


MAI Connectors

Tel: 408-686-0460

Email:  
sales@medlandandassociates.com



**EURO**  
**TERMINAL BLOCK**


**TYPE JTB552**



**SPECIFICATIONS**

WIRE ENTRANCE: .....Parallel to PCB	WIRE CAGE: .....Brass,Ni Plated
CENTER SPACING: .....5.08mm / 0.200 in.	SCREW: .....M3,Philips Screw,Steel
5.00mm / 0.197 in.	Zinc Plated
WIRE RANGE: .....12--26 AWG	TERMINAL: .....Brass,Tin Plated
ELECTRICAL RATING: .....300V, 15A	TEMPERATURE:
BREAKDOWN VOLTAGE: .....4,000V	OPERATING: .....-40°C to +105°C
MOLDING: .....Polyamide, UL94, V-0	-40°F to + 221°F
Self Extinguishing	MAX. SOLDERING: .....260°C , +500°F
MAX. TORQUE: .....5 lb-in.	for 5 seconds

**MECHANICAL DIMENSIONS**

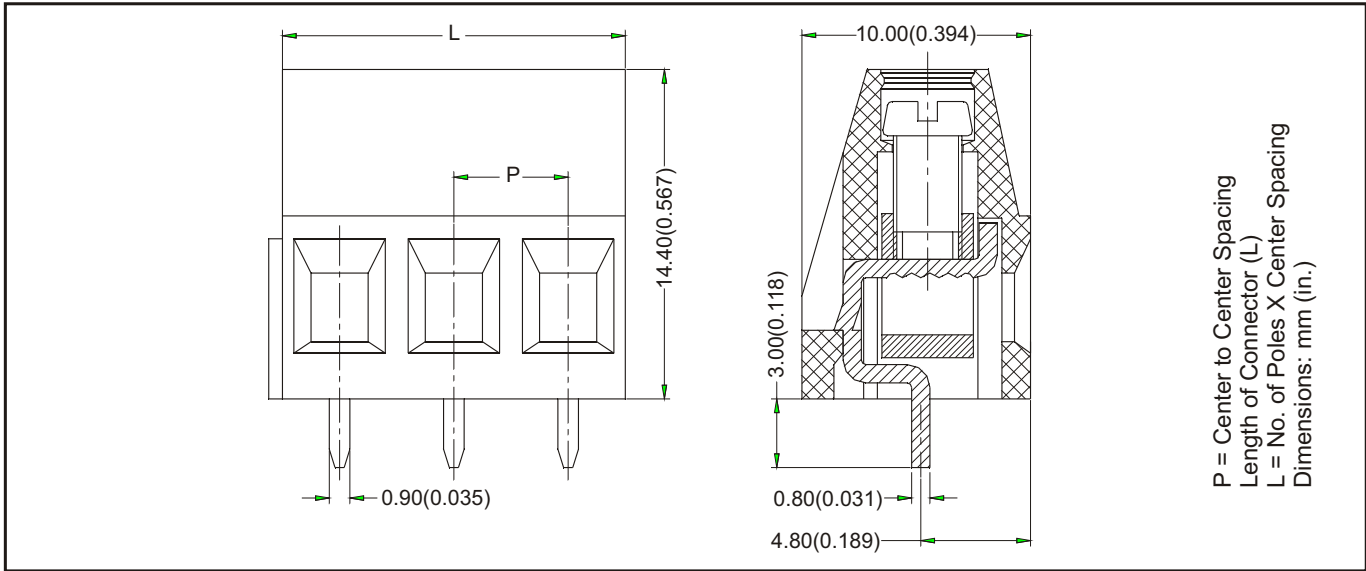

**ORDERING INFORMATION**

**MJTB552**   —  —   —  —

<b>Styles</b> 00 to 99	<b>Spacing</b> 1=5.00mm 2=5.08mm	<b>Poles</b> 02 to 32	<b>Color</b> 0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	<b>Options*</b>
---------------------------	--	--------------------------	---	-----------------

**Options\***: M1~M9, For Customer Modification (Please provide sketch).  
If more than one option is required, please separate each option with a dash (-).